


Part Number: MS15 15004

Ordering Different Lead Types:

| | |
|----------------------|---------------------------------------|
| Inside Kinked Leads | Use -A after Ametherm's part # |
| Outside Kinked Leads | Use -B after Ametherm's part # |

For example: to order an inside kinked lead use part number MS15 15004-A

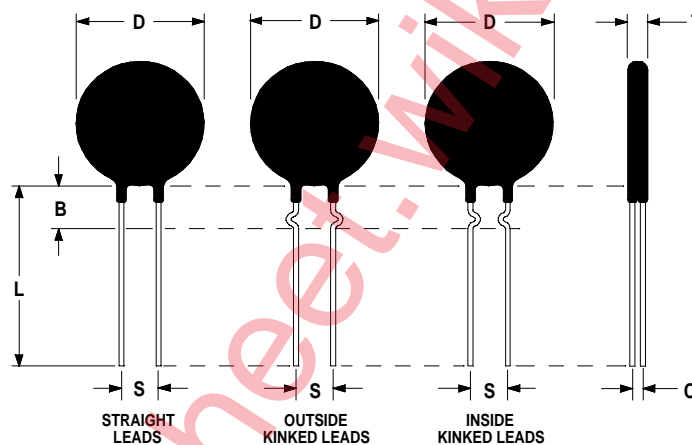

Electrical Specifications:

| | |
|---|--------------------------|
| Resistance @ 25°C | 15.0 Ω ± 25% |
| Max Steady State Current Up to 65°C | 4.5A |
| Max Recommended Energy Rating (Joules) | 155.0 J |
| Actual Failure Point of Instantaneous Energy (Joules) | 310.0 J |
| Resistance @ 100% of Max Current | 0.200 Ω |
| Resistance @ 50% of Max Current | 0.850 Ω |
| Body Temperature @ 100% Current Rating | 144 °C |
| Dissipation Constant | 49.4mW/°C |
| Thermal Time Constant | 114 seconds |
| Material Type | "G" |
| Max Recommended Capacitance @120/240/440VAC | 10500μF/2600μF/ 800μF |

Mechanical Specifications:

| | |
|------------------------------------|----------------|
| D | 15.0 ± 1.0 mm |
| T | 7.0 ± 0.7 mm |
| Lead Diameter | 1.0 ± 0.1 mm |
| S | 7.8 ± 2.0 mm |
| L | 38.0 ± 9.0 mm |
| Straight Leads Coating Run Down | 5.0 ± 1.0 mm |
| B | 6.30 ± 0.60 mm |
| C | 6.50 ± 0.60 mm |

Revision Date: March 19, 2003

Ametherm, Inc. 3111 N. Deer Run Road #4 Carson City, NV 89701
Telephone: (800) 808-2434 (775) 884-2434 Fax: (775) 884-0670

www.ametherm.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Ametherm:](#)

[MS15 15004](#)