



P4SMAJ SERIES

SURFACE MOUNT TRANSIENT VOLTAGE SUPPRESSOR POWER 400 Watts

STAND-OFF VOLTAGE

5.0 to 220 Volts

SMA / DO-214AC


Unit : inch(mm)

FEATURES

- For surface mounted applications in order to optimize board space.
- Low profile package
- Built-in strain relief
- Glass passivated junction
- Low inductance
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- High temperature soldering : 260°C /10 seconds at terminals
- Lead free in comply with EU RoHS 2002/95/EC directives

MECHANICAL DATA

- Case: JEDEC DO-214AC, Molded plastic over passivated junction
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Standard Packaging: 12mm tape (EIA-481)
- Weight: 0.002 ounce, 0.064 gram

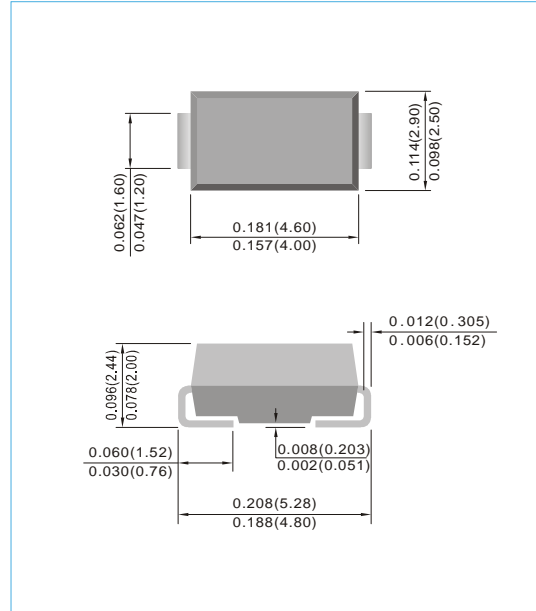

Datasheet.Wiki

DEVICES FOR BIPOLAR APPLICATIONS

For Bidirectional use C or CA Suffix for types P4SMAJ5.0 thru types P4SMAJ220.
Electrical characteristics apply in both directions.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

| Rating | Symbol | Value | Units |
|---|-----------------|-------------|-----------------------------|
| Peak Pulse Power Dissipation on $T_A = 25^\circ\text{C}$ (Notes 1,2,5, Fig.1) | P_{PPM} | 400 | Watts |
| Peak Forward Surge Current per Fig.5 (Note 3) | I_{FSM} | 40 | Amps |
| Peak Pulse Current on 10/1000 μs waveform(Note 1)Fig.2 | I_{PPM} | see Table 1 | Amps |
| Typical Thermal Resistance Junction to Air (NOTE 2) | $R_{\theta JA}$ | 70 | $^\circ\text{C} / \text{W}$ |
| Operating Junction and Storage Temperature Range | T_J, T_{STG} | -55 to +150 | $^\circ\text{C}$ |

NOTES:

1. Non-repetitive current pulse, per Fig.3 and derated above $T_A = 25^\circ\text{C}$ per Fig. 2.
2. Mounted on 5.0mm² copper pads to each terminal.
3. 8.3ms single half sine-wave, or equivalent square wave, duty cycle = 4 pulses per minutes maximum.
4. Lead temperature at 75°C = T_L .
5. Peak pulse power waveform is 10/1000 μs .



P4SMAJ SERIES

| Part Number | | Reverse Stand-off Voltage | Breakdown Voltage | | Test Current | Reverse Leakage | | Max. Clamp Voltage | Peak Pulse Current | Marking Code | |
|--|-------------|---------------------------|----------------------------------|-------|----------------|-----------------------------------|------|----------------------------------|--------------------|--------------|----|
| | | | V _{BR} @ I _T | | | I _R @ V _{RWM} | | | | | |
| | | V _{RWM} | Min. | Max. | I _T | UNI | BI | V _C @ I _{PP} | I _{PP} | | |
| UNI | BI | V | V | V | mA | μA | μA | V | A | UNI | BI |
| 400W Transient Voltage Suppressor | | | | | | | | | | | |
| P4SMAJ5.0 | P4SMAJ5.0C | 5 | 6.4 | 7.55 | 10 | 800 | 1600 | 9.6 | 41.6 | HD | TD |
| P4SMAJ5.0A | P4SMAJ5.0CA | 5 | 6.4 | 7.25 | 10 | 800 | 1600 | 9.2 | 43.5 | HE | TE |
| P4SMAJ6.0 | P4SMAJ6.0C | 6 | 6.67 | 8.45 | 10 | 800 | 1600 | 11.4 | 35.1 | HF | TF |
| P4SMAJ6.0A | P4SMAJ6.0CA | 6 | 6.67 | 7.67 | 10 | 800 | 1600 | 10.3 | 38.8 | HG | TG |
| P4SMAJ6.5 | P4SMAJ6.5C | 6.5 | 7.22 | 9.14 | 10 | 500 | 1000 | 12.3 | 32.5 | HH | TH |
| P4SMAJ6.5A | P4SMAJ6.5CA | 6.5 | 7.22 | 8.3 | 10 | 500 | 1000 | 11.2 | 35.7 | HK | TK |
| P4SMAJ7.0 | P4SMAJ7.0C | 7 | 7.78 | 9.86 | 10 | 200 | 400 | 13.3 | 30.1 | HL | TL |
| P4SMAJ7.0A | P4SMAJ7.0CA | 7 | 7.78 | 8.95 | 10 | 200 | 400 | 12 | 33.3 | HM | TM |
| P4SMAJ7.5 | P4SMAJ7.5C | 7.5 | 8.33 | 10.67 | 1 | 100 | 200 | 14.3 | 28 | HN | TN |
| P4SMAJ7.5A | P4SMAJ7.5CA | 7.5 | 8.33 | 9.58 | 1 | 100 | 200 | 12.9 | 31 | HP | TP |
| P4SMAJ8.0 | P4SMAJ8.0C | 8 | 8.89 | 11.3 | 1 | 50 | 100 | 15 | 26.5 | HQ | TQ |
| P4SMAJ8.0A | P4SMAJ8.0CA | 8 | 8.89 | 10.23 | 1 | 50 | 100 | 13.6 | 29.4 | HR | TR |
| P4SMAJ8.5 | P4SMAJ8.5C | 8.50 | 9.44 | 11.92 | 1 | 10 | 20 | 15.9 | 25.1 | HS | TS |
| P4SMAJ8.5A | P4SMAJ8.5CA | 8.50 | 9.44 | 10.82 | 1 | 10 | 20 | 14.4 | 27.7 | HT | TT |
| P4SMAJ9.0 | P4SMAJ9.0C | 9 | 10 | 12.6 | 1 | 5 | 5 | 16.9 | 23.6 | HU | TU |
| P4SMAJ9.0A | P4SMAJ9.0CA | 9 | 10 | 11.5 | 1 | 5 | 5 | 15.4 | 26 | HV | TV |
| P4SMAJ10 | P4SMAJ10C | 10 | 11.1 | 14.1 | 1 | 5 | 5 | 18.8 | 21.2 | HW | TW |
| P4SMAJ10A | P4SMAJ10CA | 10 | 11.1 | 12.8 | 1 | 5 | 5 | 17 | 23.5 | HX | TX |
| P4SMAJ11 | P4SMAJ11C | 11 | 12.2 | 15.4 | 1 | 1 | 1 | 20.1 | 20 | HY | TY |
| P4SMAJ11A | P4SMAJ11CA | 11 | 12.2 | 14 | 1 | 1 | 1 | 18.2 | 22 | HZ | TZ |
| P4SMAJ12 | P4SMAJ12C | 12 | 13.3 | 16.9 | 1 | 1 | 1 | 22 | 18.1 | ID | UD |
| P4SMAJ12A | P4SMAJ12CA | 12 | 13.3 | 15.3 | 1 | 1 | 1 | 19.9 | 20.1 | IE | UE |
| P4SMAJ13 | P4SMAJ13C | 13 | 14.4 | 18.2 | 1 | 1 | 1 | 23.8 | 16.8 | IF | UF |
| P4SMAJ13A | P4SMAJ13CA | 13 | 14.4 | 16.5 | 1 | 1 | 1 | 21.5 | 18.6 | IG | UG |
| P4SMAJ14 | P4SMAJ14C | 14 | 15.6 | 19.8 | 1 | 1 | 1 | 25.8 | 15.5 | IH | UH |
| P4SMAJ14A | P4SMAJ14CA | 14 | 15.6 | 17.9 | 1 | 1 | 1 | 23.2 | 17.2 | IK | UK |
| P4SMAJ15 | P4SMAJ15C | 15 | 16.7 | 21.1 | 1 | 1 | 1 | 26.9 | 14.8 | IL | UL |
| P4SMAJ15A | P4SMAJ15CA | 15 | 16.7 | 19.2 | 1 | 1 | 1 | 24.4 | 16.4 | IM | UM |
| P4SMAJ16 | P4SMAJ16C | 16 | 17.8 | 22.6 | 1 | 1 | 1 | 28.8 | 13.8 | IN | UN |
| P4SMAJ16A | P4SMAJ16CA | 16 | 17.8 | 20.5 | 1 | 1 | 1 | 26 | 15.3 | IP | UP |
| P4SMAJ17 | P4SMAJ17C | 17 | 18.9 | 23.9 | 1 | 1 | 1 | 30.5 | 13.1 | IQ | UQ |
| P4SMAJ17A | P4SMAJ17CA | 17 | 18.9 | 21.7 | 1 | 1 | 1 | 27.6 | 14.5 | IR | UR |
| P4SMAJ18 | P4SMAJ18C | 18 | 20 | 25.3 | 1 | 1 | 1 | 32.2 | 12.4 | IS | US |
| P4SMAJ18A | P4SMAJ18CA | 18 | 20 | 23.3 | 1 | 1 | 1 | 29.2 | 13.7 | IT | UT |
| P4SMAJ20 | P4SMAJ20C | 20 | 22.2 | 28.1 | 1 | 1 | 1 | 35.8 | 11.1 | IU | UU |
| P4SMAJ20A | P4SMAJ20CA | 20 | 22.2 | 25.5 | 1 | 1 | 1 | 32.4 | 12.3 | IV | UV |
| P4SMAJ22 | P4SMAJ22C | 22 | 24.4 | 30.9 | 1 | 1 | 1 | 39.4 | 10.1 | IW | UW |
| P4SMAJ22A | P4SMAJ22CA | 22 | 24.4 | 28 | 1 | 1 | 1 | 35.5 | 11.2 | IX | UX |
| P4SMAJ24 | P4SMAJ24C | 24 | 26.7 | 33.8 | 1 | 1 | 1 | 43 | 9.3 | IY | UY |
| P4SMAJ24A | P4SMAJ24CA | 24 | 26.7 | 30.7 | 1 | 1 | 1 | 38.9 | 10.3 | IZ | UZ |
| P4SMAJ26 | P4SMAJ26C | 26 | 28.9 | 36.6 | 1 | 1 | 1 | 46.6 | 8.6 | JD | VD |
| P4SMAJ26A | P4SMAJ26CA | 26 | 28.9 | 33.2 | 1 | 1 | 1 | 42.1 | 9.5 | JE | VE |
| P4SMAJ28 | P4SMAJ28C | 28 | 31.1 | 39.4 | 1 | 1 | 1 | 50 | 8 | JF | VF |
| P4SMAJ28A | P4SMAJ28CA | 28 | 31.1 | 35.8 | 1 | 1 | 1 | 45.4 | 8.8 | JG | VG |
| P4SMAJ30 | P4SMAJ30C | 30 | 33.3 | 42.2 | 1 | 1 | 1 | 53.5 | 7.5 | JH | VH |
| P4SMAJ30A | P4SMAJ30CA | 30 | 33.3 | 38.3 | 1 | 1 | 1 | 48.4 | 8.3 | JK | VK |
| P4SMAJ33 | P4SMAJ33C | 33 | 36.7 | 46.5 | 1 | 1 | 1 | 59 | 6.8 | JL | VL |
| P4SMAJ33A | P4SMAJ33CA | 33 | 36.7 | 42.2 | 1 | 1 | 1 | 53.3 | 7.5 | JM | VM |
| P4SMAJ36 | P4SMAJ36C | 36 | 40 | 50.7 | 1 | 1 | 1 | 64.3 | 6.2 | JN | VN |
| P4SMAJ36A | P4SMAJ36CA | 36 | 40 | 46 | 1 | 1 | 1 | 58.1 | 6.9 | JP | VP |
| P4SMAJ40 | P4SMAJ40C | 40 | 44.4 | 56.3 | 1 | 1 | 1 | 71.4 | 5.6 | JQ | VQ |
| P4SMAJ40A | P4SMAJ40CA | 40 | 44.4 | 51.1 | 1 | 1 | 1 | 64.5 | 6.2 | JR | VR |



P4SMAJ SERIES

| Part Number | | Reverse Stand-off Voltage | Breakdown Voltage | | Test Current | Reverse Leakage | | Max. Clamp Voltage | Peak Pulse Current | Marking Code | |
|--|-------------|---------------------------|----------------------------------|-------|----------------|-----------------------------------|----|----------------------------------|--------------------|--------------|----|
| | | | V _{BR} @ I _T | | | I _R @ V _{RWM} | | | | | |
| | | V _{RWM} | Min. | Max. | I _T | UNI | BI | V _C @ I _{PP} | I _{PP} | | |
| UNI | BI | V | V | V | mA | μA | μA | V | A | UNI | BI |
| 400W Transient Voltage Suppressor | | | | | | | | | | | |
| P4SMAJ43 | P4SMAJ43C | 43 | 47.8 | 60.5 | 1 | 1 | 1 | 76.7 | 5.2 | JS | VS |
| P4SMAJ43A | P4SMAJ43CA | 43 | 47.8 | 54.9 | 1 | 1 | 1 | 69.4 | 5.7 | JT | VT |
| P4SMAJ45 | P4SMAJ45C | 45 | 50 | 63.3 | 1 | 1 | 1 | 80.3 | 5 | JU | VU |
| P4SMAJ45A | P4SMAJ45CA | 45 | 50 | 57.5 | 1 | 1 | 1 | 72.7 | 5.5 | JV | VV |
| P4SMAJ48 | P4SMAJ48C | 48 | 53.3 | 67.5 | 1 | 1 | 1 | 85.5 | 4.7 | JW | VW |
| P4SMAJ48A | P4SMAJ48CA | 48 | 53.3 | 61.3 | 1 | 1 | 1 | 77.4 | 5.2 | JX | VX |
| P4SMAJ51 | P4SMAJ51C | 51 | 56.7 | 71.8 | 1 | 1 | 1 | 91.1 | 4.4 | JY | VY |
| P4SMAJ51A | P4SMAJ51CA | 51 | 56.7 | 65.2 | 1 | 1 | 1 | 82.4 | 4.9 | JZ | VZ |
| P4SMAJ54 | P4SMAJ54C | 54 | 60 | 76 | 1 | 1 | 1 | 96.3 | 4.2 | RD | WD |
| P4SMAJ54A | P4SMAJ54CA | 54 | 60 | 69 | 1 | 1 | 1 | 87.1 | 4.6 | RE | WE |
| P4SMAJ58 | P4SMAJ58C | 58 | 64.4 | 81.6 | 1 | 1 | 1 | 103 | 3.9 | RF | WF |
| P4SMAJ58A | P4SMAJ58CA | 58 | 64.4 | 74.1 | 1 | 1 | 1 | 93.6 | 4.3 | RG | WG |
| P4SMAJ60 | P4SMAJ60C | 60 | 66.7 | 84.5 | 1 | 1 | 1 | 107 | 3.7 | RH | WH |
| P4SMAJ60A | P4SMAJ60CA | 60 | 66.7 | 76.7 | 1 | 1 | 1 | 96.8 | 4.1 | RK | WK |
| P4SMAJ64 | P4SMAJ64C | 64 | 71.1 | 90.1 | 1 | 1 | 1 | 114 | 3.5 | RL | WL |
| P4SMAJ64A | P4SMAJ64CA | 64 | 71.1 | 81.8 | 1 | 1 | 1 | 103 | 3.9 | RM | WM |
| P4SMAJ70 | P4SMAJ70C | 70 | 77.8 | 98.6 | 1 | 1 | 1 | 125 | 3.2 | RN | WN |
| P4SMAJ70A | P4SMAJ70CA | 70 | 77.8 | 89.5 | 1 | 1 | 1 | 113 | 3.5 | RP | WP |
| P4SMAJ75 | P4SMAJ75C | 75 | 83.3 | 105.7 | 1 | 1 | 1 | 134 | 3 | RQ | WQ |
| P4SMAJ75A | P4SMAJ75CA | 75 | 83.3 | 95.8 | 1 | 1 | 1 | 121 | 3.3 | RR | WR |
| P4SMAJ78 | P4SMAJ78C | 78 | 86.7 | 109.8 | 1 | 1 | 1 | 139 | 2.9 | RS | WS |
| P4SMAJ78A | P4SMAJ78CA | 78 | 86.7 | 99.7 | 1 | 1 | 1 | 126 | 2.2 | RT | WT |
| P4SMAJ85 | P4SMAJ85C | 85 | 94.4 | 119.2 | 1 | 1 | 1 | 151 | 2.6 | RU | WU |
| P4SMAJ85A | P4SMAJ85CA | 85 | 94.4 | 108.2 | 1 | 1 | 1 | 137 | 2.9 | RV | WV |
| P4SMAJ90 | P4SMAJ90C | 90 | 100 | 126.5 | 1 | 1 | 1 | 160 | 2.5 | RW | WW |
| P4SMAJ90A | P4SMAJ90CA | 90 | 100 | 115.5 | 1 | 1 | 1 | 146 | 2.7 | RX | WX |
| P4SMAJ100 | P4SMAJ100C | 100 | 111 | 141 | 1 | 1 | 1 | 179 | 2.2 | RY | WY |
| P4SMAJ100A | P4SMAJ100CA | 100 | 111 | 128 | 1 | 1 | 1 | 162 | 2.5 | RZ | WZ |
| P4SMAJ110 | P4SMAJ110C | 110 | 122 | 154.5 | 1 | 1 | 1 | 196 | 2 | SD | XD |
| P4SMAJ110A | P4SMAJ110CA | 110 | 122 | 140.5 | 1 | 1 | 1 | 177 | 2.3 | SE | XE |
| P4SMAJ120 | P4SMAJ120C | 120 | 133 | 169 | 1 | 1 | 1 | 214 | 1.9 | SF | XF |
| P4SMAJ120A | P4SMAJ120CA | 120 | 133 | 153 | 1 | 1 | 1 | 193 | 2 | SG | XG |
| P4SMAJ130 | P4SMAJ130C | 130 | 144 | 182.5 | 1 | 1 | 1 | 231 | 1.7 | SH | XH |
| P4SMAJ130A | P4SMAJ130CA | 130 | 144 | 165.5 | 1 | 1 | 1 | 209 | 1.9 | SK | XK |
| P4SMAJ150 | P4SMAJ150C | 150 | 167 | 211.5 | 1 | 1 | 1 | 268 | 1.5 | SL | XL |
| P4SMAJ150A | P4SMAJ150CA | 150 | 167 | 192.5 | 1 | 1 | 1 | 243 | 1.6 | SM | XM |
| P4SMAJ160 | P4SMAJ160C | 160 | 178 | 226 | 1 | 1 | 1 | 287 | 1.4 | SN | XN |
| P4SMAJ160A | P4SMAJ160CA | 160 | 178 | 205 | 1 | 1 | 1 | 259 | 1.5 | SP | XP |
| P4SMAJ170 | P4SMAJ170C | 170 | 189 | 239.5 | 1 | 1 | 1 | 304 | 1.3 | SQ | XQ |
| P4SMAJ170A | P4SMAJ170CA | 170 | 189 | 217.5 | 1 | 1 | 1 | 275 | 1.4 | SR | XR |
| P4SMAJ180 | P4SMAJ180C | 180 | 198 | 253.8 | 1 | 1 | 1 | 322 | 1.2 | SS | YS |
| P4SMAJ180A | P4SMAJ180CA | 180 | 198 | 230.4 | 1 | 1 | 1 | 292 | 1.3 | ST | YT |
| P4SMAJ190 | P4SMAJ190C | 190 | 209 | 267.9 | 1 | 1 | 1 | 340 | 1.2 | SU | YU |
| P4SMAJ190A | P4SMAJ190CA | 190 | 209 | 243.2 | 1 | 1 | 1 | 308 | 1.3 | SV | YV |
| P4SMAJ200 | P4SMAJ200C | 200 | 220 | 282 | 1 | 1 | 1 | 358 | 1.1 | SW | YW |
| P4SMAJ200A | P4SMAJ200CA | 200 | 220 | 256 | 1 | 1 | 1 | 324 | 1.2 | SX | YX |
| P4SMAJ210 | P4SMAJ210C | 210 | 231 | 296.1 | 1 | 1 | 1 | 376 | 1.1 | SY | YY |
| P4SMAJ210A | P4SMAJ210CA | 210 | 231 | 268.8 | 1 | 1 | 1 | 340 | 1.2 | SZ | YZ |
| P4SMAJ220 | P4SMAJ220C | 220 | 242 | 310.2 | 1 | 1 | 1 | 394 | 1 | GD | ZD |
| P4SMAJ220A | P4SMAJ220CA | 220 | 242 | 281.6 | 1 | 1 | 1 | 356 | 1.1 | GE | ZE |



P4SMAJ SERIES

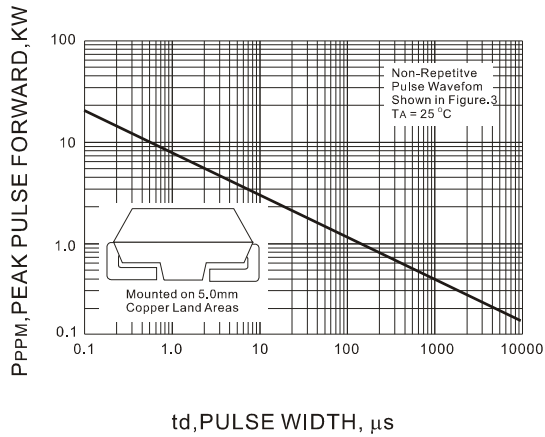


Fig.1 PEAK PULSE POWER RATING CURVE

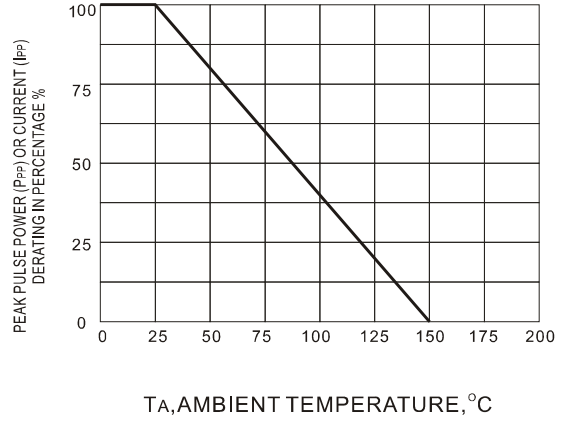


Fig.2 DERATING CURVE

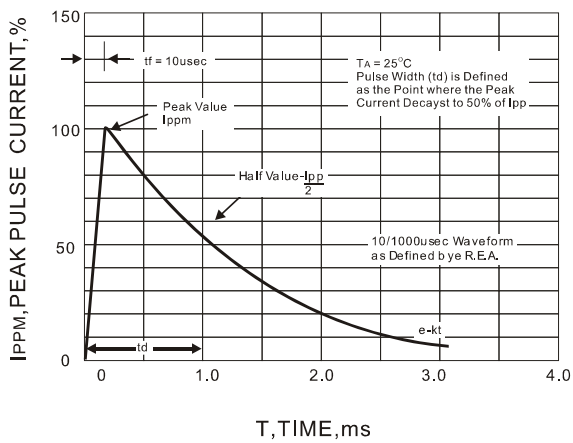


Fig.3 PULSE WAVEFORM

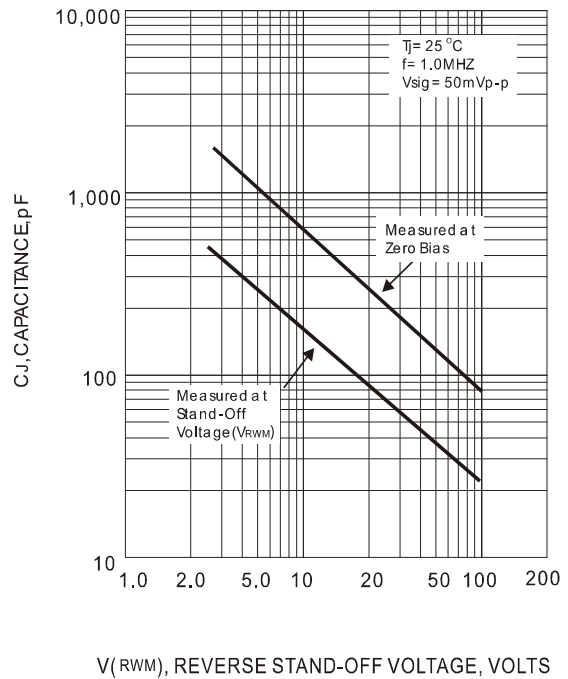


Fig.4 TYPICAL JUNCTION CAPACITANCE


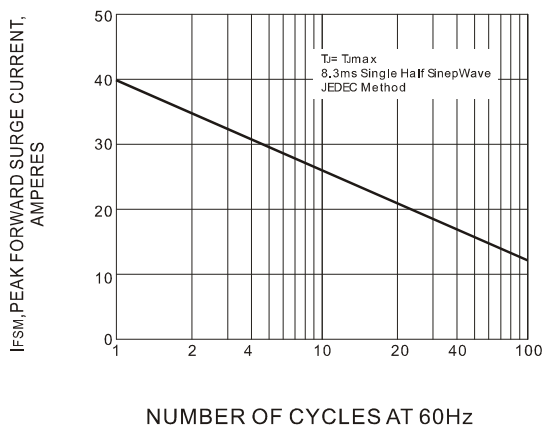


Fig.5 MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT



P4SMAJ SERIES

MOUNTING PAD LAYOUT

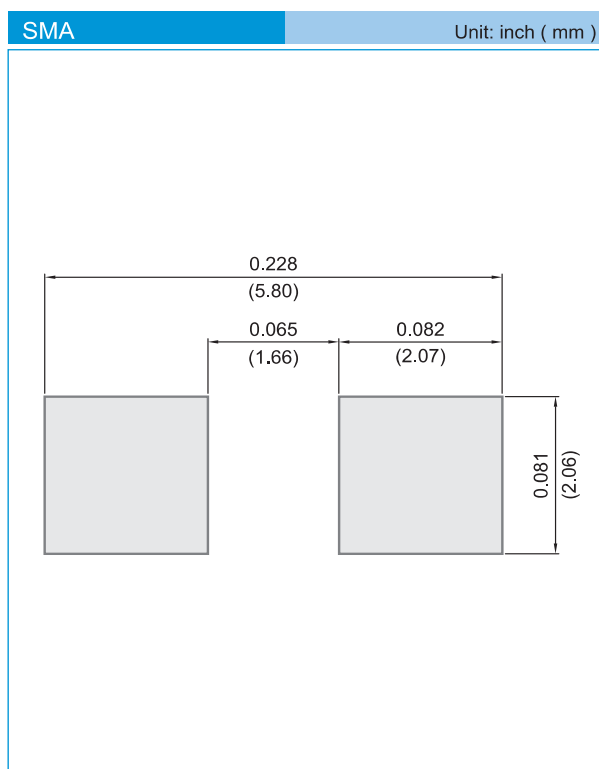

ORDER INFORMATION

- Packing information
 - T/R - 7.5K per 13" plastic Reel
 - T/R - 1.8Kper 7" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2012

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.



P4SMAJ SERIES

For example :

RB500V-40_R2_00001



| Packing Code XX | | | | Version Code XXXXX | | |
|------------------------|----------------------|-------------------|----------------------|---------------------------|----------------------|---------------------------------------|
| Packing type | 1 st Code | Packing size code | 2 nd Code | HF or RoHS | 1 st Code | 2 nd ~5 th Code |
| T/B | A | N/A | 0 | HF | 0 | serial number |
| T/R | R | 7" | 1 | RoHS | 1 | serial number |
| B/P | B | 13" | 2 | | | |
| T/P | T | 26mm | X | | | |
| TRR | S | 52mm | Y | | | |
| TRL | L | PBCU | U | | | |
| FORMING | F | PBCD | D | | | |

Part No_packing code_Version

P4SMAJ5.0A_R1_00001

P4SMAJ5.0A_R1_10001

P4SMAJ5.0A_R2_00001

P4SMAJ5.0A_R2_10001